


## #9301 HINGED GLASS DOOR VINYL SWING DOOR

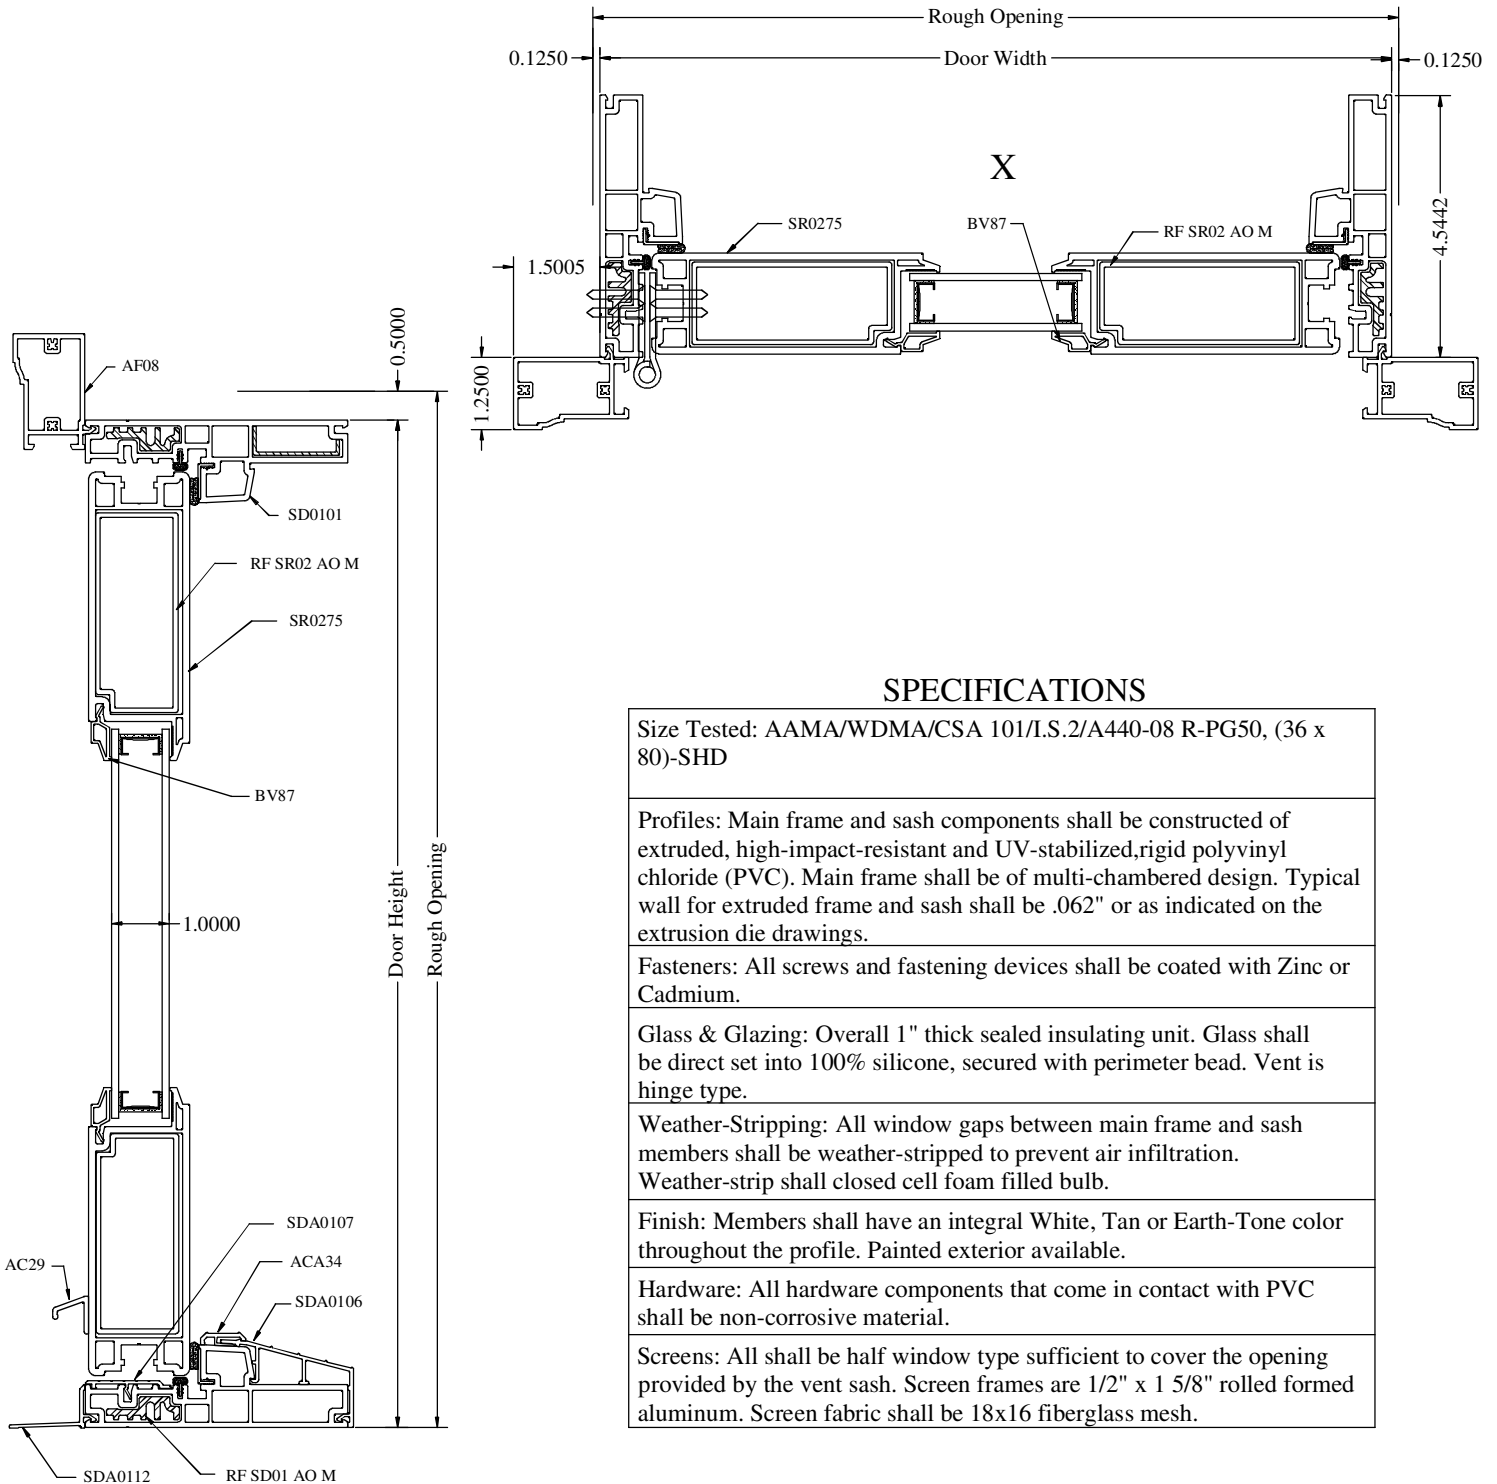

### SPECIFICATIONS

Size Tested: AAMA/WDMA/CSA 101/I.S.2/A440-08 R-PG50, (36 x 80)-SHD

**Profiles:** Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.

**Fasteners:** All screws and fastening devices shall be coated with Zinc or Cadmium.

**Glass & Glazing:** Overall 1" thick sealed insulating unit. Glass shall be direct set into 100% silicone, secured with perimeter bead. Vent is hinge type.

**Weather-Stripping:** All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall closed cell foam filled bulb.

**Finish:** Members shall have an integral White, Tan or Earth-Tone color throughout the profile. Painted exterior available.

**Hardware:** All hardware components that come in contact with PVC shall be non-corrosive material.

**Screens:** All shall be half window type sufficient to cover the opening provided by the vent sash. Screen frames are 1/2" x 1 5/8" rolled formed aluminum. Screen fabric shall be 18x16 fiberglass mesh.